
Vera C. Rubin Observatory Data Management

LDM-503-11a: ComCam OPS Readiness Test Plan and Report

Robert Gruendl

DMTR-231

Latest Revision: 2020-11-12

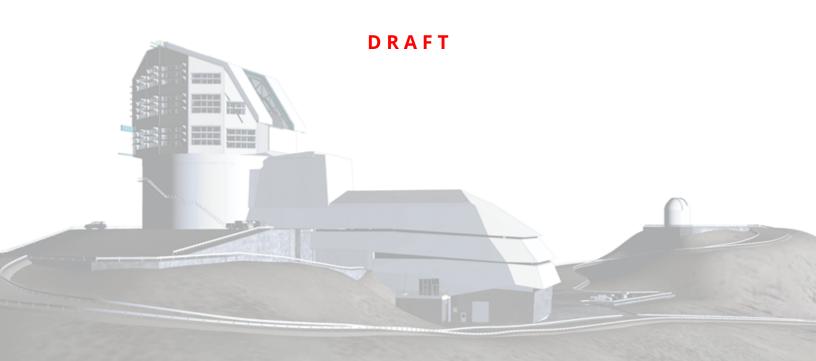

Abstract

This is the test plan and report for **ComCam OPS Readiness** (LDM-503-11a), an LSST milestone pertaining to the Data Management Subsystem.



Change Record

| Version | Date | Description | Owner name |
|---------|------------|---------------------------------------|----------------|
| | 2020-08-19 | First draft | Robert Gruendl |
| 1.0 | 2020-09-04 | Test Plan LVV-P76 approved. DM-16196. | Robert Gruendl |
| 2.0 | 2020-11-11 | Test Campaign LVV-P76 completed. DM- | Robert Gruendl |
| | | 17125. | |

Document curator: Robert Gruendl

Document source location: https://github.com/lsst-dm/DMTR-231

Version from source repository: f2b8f70

Contents

| 1 | Introduction | 1 |
|---|---|----|
| | 1.1 Objectives | 1 |
| | 1.2 System Overview | 1 |
| | 1.3 Applicable Documents | 1 |
| | 1.4 Document Overview | 1 |
| | 1.5 References | 2 |
| 2 | Test Plan Details | 3 |
| | 2.1 Data Collection | 3 |
| | 2.2 Verification Environment | 3 |
| | 2.3 Entry Criteria | 3 |
| | 2.4 Exit Criteria | 3 |
| | 2.5 Related Documentation | 3 |
| | 2.6 PMCS Activity | 3 |
| 3 | Personnel | 4 |
| 4 | Test Campaign Overview | 5 |
| | 4.1 Summary | 5 |
| | 4.2 Overall Assessment | 5 |
| | 4.3 Recommended Improvements | 5 |
| 5 | Detailed Test Results | 6 |
| | 5.1 Test Cycle LVV-C159 | 6 |
| | 5.1.1 Software Version/Baseline | 6 |
| | 5.1.2 Configuration | 6 |
| | 5.1.3 Test Cases in LVV-C159 Test Cycle | 6 |
| | 5.1.3.1 LVV-T1935 - Demonstrate ComCam Data Processing Capability . | 6 |
| | 5.1.3.2 LVV-T1934 - ComCam Data Transfer and Ingestion | 9 |
| Α | Acronyms used in this document | 12 |

B Traceability 13



LDM-503-11a: ComCam OPS Readiness Test Plan and Report

1 Introduction

1.1 Objectives

This test plan verifies that DM software is ready to obtain and process ComCam observations. Since this test campaign is needed prior to on-sky data acquisition the tests are necessarily focused on the ability to process test-stand data. Therefore, the elements focus on the generic ability to process ComCam data.

1.2 System Overview

The system requires an operating ComCam at the Summit or on a test stand (either at the Base or Tucson). LDM-503-06 will have already shown that data acquisition (DAQ), archiver, header service, transfer mechanism, and ingest to the DBB are functional. Those systems are re-verified by this test as: 1) changes will almost certainly have occurred and 2) for this test to succeed the data must be properly formed and ingested for processing to succeed.

1.3 Applicable Documents

LDM-503: Data Management Test Plan

LDM-639: Data Management Acceptance Test Specification

1.4 Document Overview

This document was generated from Jira, obtaining the relevant information from the LVV-P76 Jira Test Plan and related Test Cycles (LVV-C159).

Section 1 provides an overview of the test campaign, the system under test (Data Manage-

DRAFT 1 DRAFT

ment), the applicable documentation, and explains how this document is organized. Section 2 provides additional information about the test plan, like for example the configuration used for this test or related documentation. Section 3 describes the necessary roles and lists the individuals assigned to them.

Section 4 provides a summary of the test results, including an overview in Table 2, an overall assessment statement and suggestions for possible improvements. Section 5 provides detailed results for each step in each test case.

The current status of test plan LVV-P76 in Jira is **Completed**.

1.5 References

- [1] **[LDM-639]**, Guy, L., 2018, *DM Acceptance Test Specification*, LDM-639, URL https://ls.st/LDM-639
- [2] **[LDM-503]**, O'Mullane, W., Swinbank, J., Jurić, M., Economou, F., 2018, *Data Management Test Plan*, LDM-503, URL https://ls.st/LDM-503

DRAFT 2 DRAFT

2 Test Plan Details

2.1 Data Collection

Observing is not required for this test campaign.

2.2 Verification Environment

This test assumes a working DBB (Data BackBone) where raw ComCam data are available and ingested into a Butler repository (can be Gen2 or Gen3). Alternatively, the Base OODS (Observatory Operations Data System) could be used for these tests. In either case (DBB or OODS) compute hardware must be available that can see the DBB (USDF) or OODS (Base compute). A current DM production stack should be used but the tests do not require more than a single node (and could run on a single-core).

2.3 Entry Criteria

ComCam produces data with proper headers and can be transferred to the USDF.

2.4 Exit Criteria

Successful ingest and processing of ComCam data with pipeline tasks in the DM stack and resultant data products made available through an RSP instance.

2.5 Related Documentation

No additional documentation provided.

2.6 PMCS Activity

Primavera milestones related to the test campaign: LDM-503-11a: ComCam Ops Readiness

DRAFT 3 DRAFT

3 Personnel

The personnel involved in the test campaign is shown in the following table.

| | T. Plan LVV-P76 owner: | Robert Gruendl | |
|------------|--------------------------|-----------------------|---------------------------|
| | T. Cycle LVV-C159 owner: | Robert Gruendl | |
| Test Cases | Assigned to | Executed by | Additional Test Personnel |
| LVV-T1935 | Robert Gruendl | Robert Gruendl | |
| LVV-T1934 | Robert Gruendl | Robert Gruendl | |



4 Test Campaign Overview

4.1 Summary

| T. Plan LVV-P76: | | LDM-503-11a: ComCam OPS Readiness | | Completed |
|--------------------|------|-----------------------------------|--|---------------------------|
| T. Cycle LVV-C159: | | LDM-503-11a: ComCam OPS Readiness | | Done |
| Test Cases | Ver. | Status | Comment | Issues |
| LVV-T1935 | 1 | Pass | Test script was executed by verifying that procesduring OPS Rehearsal 2 generated the expected calitions and ingested same into the calibration reposing the shared file area (currently /project/shared/cCam/CALIB). | bra- tory |
| LVV-T1934 | 1 | Pass | Data transfer from ComCam (temporarily installed the Base Data Center) has been routinely perform since July 2020. On the day this test was executed (2020-10-28) the Data BackBone endpoint at NCSA checked for recently transferred data and then shared repository was checked to make sure that data were ingested and made generally available. | med uted was the |

Table 2: Test Campaign Summary

4.2 Overall Assessment

LVV-P76 was executed on 2020-10-28. During that execution it was demonstrated that Com-Cam data taken in the Base Data Center is successfully being transferred, archived and ingested (made available for use to DM staff) at NCSA. Furthermore it was verified that during the OPS Rehearsal #2 that bias and flat frames were routinely processed and used to form calibration products (demonstrating DM is capable of processing ComCam data).

4.3 Recommended Improvements

Execution of the current plan occurred using a Gen2 Butler implementation. It is recommended that these tests should be re-verified once ComCam is installed at the summit facility and the DM stack is using the Gen3 Butler implementation for processing data.

DRAFT 5 DRAFT

5 Detailed Test Results

5.1 Test Cycle LVV-C159

Open test cycle LDM-503-11a: ComCam OPS Readiness in Jira.

Test Cycle name: LDM-503-11a: ComCam OPS Readiness

Status: Done

Test that ComCam data can be received in the DBB, be made available and processed with results also made available to DM staff.

5.1.1 Software Version/Baseline

lsst_distrib w_2020_30

5.1.2 Configuration

ComCam operating at Base/Summit in a test stand capable of delivering image to NCSA. Data Backbone endpoint and OODS (Observatory Operations Data Service) ready to receive and ingest data.

5.1.3 Test Cases in LVV-C159 Test Cycle

5.1.3.1 LVV-T1935 - Demonstrate ComCam Data Processing Capability

Version 1. Open LVV-T1935 test case in Jira.

To process raw ComCam data and demonstrate that the results are available either in the shared DM development environment/repository or in the RSP.

Preconditions:

ComCam data acquisition and ingest are nominal. (LVV-T1934)

Execution status: Pass

Final comment:

Test script was executed by verifying that processing during OPS Rehearsal 2 generated the expected calibrations and ingested same into the calibration repository in the shared file area (currently /project/shared/comCam/CALIB).

Detailed steps results:

| Step | Step Details | | | | |
|------|--|--|--|--|--|
| 1 | Description | | | | |
| | Obtain BIAS and FLAT sequences (minimum of 3 exposures each) | | | | |
| | Test Data | | | | |
| | Acquired from ComCam Archiver. | | | | |
| | Expected Result | | | | |
| | Data acquired, ingested, and available in shared work space. | | | | |
| | Actual Result | | | | |
| | During OPS rehearsal #2 (see DMTN-159) bias and flat sequences were acquired. Using the first night as an example: | | | | |
| | cd /project/shared/comCam sqlite3 _parent/registry.sqlite3 select expld,dayObs,imageType,raftName,detectorName from raw where dayObs='2020-07-27'; | | | | |
| | Shows sufficient BIAS and FLAT data have been properly ingested to the shared work-space. | | | | |
| | Status: Pass | | | | |
| 2 | Description | | | | |
| | Process BIAS frames | | | | |
| | Test Data | | | | |
| | From Step 1 | | | | |
| | Example Code | | | | |

DRAFT 7 DRAFT

LDM-503-11a: ComCam OPS Readiness Test Plan and Report

Rubin Observatory

3

Example Code

```
# setup a current LSST stack, currently:
/software/lsstsw/stack3/loadLSST.bash
setup -v lsst_distrib
setenv REPODIR=/project/shared/comCam
setenv VER_DIR={verification_dir}
constructBias.py $REPODIR --rerun $VER_DIR \
  --id expId=2020070800001^2020070800002^2020070800003 --batch-type none -c isr.doCrosstalk=False -j 9
ingestCalibs.py $REPODIR $REPODIR/rerun/$VER_DIR/bias/*/*.fits --validity 9999 --mode=link --calib $REPODIR/CALI
Expected Result
Successful execution of BIAS reduction software (currently
constructBias.py and ingestion)
Actual Result
The processing notes that accompany DMTN-159 (are available in the github repo OPS_Rehearsal_2).
There we find that constructBias.py and ingestCalibs.py were executed and find in the calibration repo
the associated ingested bias entries:
cd /project/shared/comCam
sqlite3 CALIB/calibRegistry.sqlite3
select * from bias where calibDate='2020-07-27';
1|NONE|R22|S00|0|2020-07-27|1993-03-12|2020-07-28
2|NONE|R22|S01|1|2020-07-27|1993-03-12|2020-07-28
3|NONE|R22|S02|2|2020-07-27|1993-03-12|2020-07-28
4|NONE|R22|S10|3|2020-07-27|1993-03-12|2020-07-28
5|NONE|R22|S11|4|2020-07-27|1993-03-12|2020-07-28
6|NONE|R22|S12|5|2020-07-27|1993-03-12|2020-07-28
7|NONE|R22|S20|6|2020-07-27|1993-03-12|2020-07-28
8 | NONE | R22 | S21 | 7 | 2020-07-27 | 1993-03-12 | 2020-07-28
9|NONE|R22|S22|8|2020-07-27|1993-03-12|2020-07-28
Status: Pass
Description
Process FLAT frames
Test Data
From Step 1 (and step 2)
```

DRAFT 8 DRAFT

```
# setup a current LSST stack, currently:
/software/lsstsw/stack3/loadLSST.bash
setup -v lsst_distrib
setenv REPODIR=/project/shared/comCam
setenv VER_DIR={verification_dir}
constructFlat.py $REPODIR --rerun $VER_DIR \
  --id expId=2020070100152..2020070100154 filter=r --batch-type none -j 9 -c isr.doCrosstalk=False
ingestCalibs.py $REPODIR $REPODIR/rerun/$VER_DIR/flat/*/*.fits \
    --validity 9999 --mode=link --calib $REPODIR/CALIB
Expected Result
Successful execution of FLAT reduction software (currently constructFlat.py and ingestion)
Actual Result
Similar to step 2:
select * from flat where calibDate='2020-07-27';
1|r|R22|S00|0|2020-07-27|1993-03-12|2020-07-28
2|r|R22|S01|1|2020-07-27|1993-03-12|2020-07-28
3|r|R22|S02|2|2020-07-27|1993-03-12|2020-07-28
4|r|R22|S10|3|2020-07-27|1993-03-12|2020-07-28
5|r|R22|S11|4|2020-07-27|1993-03-12|2020-07-28
6|r|R22|S12|5|2020-07-27|1993-03-12|2020-07-28
7|r|R22|S20|6|2020-07-27|1993-03-12|2020-07-28
8|r|R22|S21|7|2020-07-27|1993-03-12|2020-07-28
9|r|R22|S22|8|2020-07-27|1993-03-12|2020-07-28
Status: Pass
```

5.1.3.2 LVV-T1934 - ComCam Data Transfer and Ingestion

Version **1**. Open *LVV-T1934* test case in Jira.

Verify that ComCam Archiver data taken are transferred to NCSA Data BackBone endpoint and Ingested

DRAFT 9 DRAFT

Preconditions:

Operating ComCam and Base or Summit (test-stand or mounted on TMA)

Execution status: Pass

Final comment:

Data transfer from ComCam (temporarily installed in the Base Data Center) has been routinely performed since July 2020. On the day this test was executed (2020-10-28) the Data BackBone endpoint at NCSA was checked for recently transferred data and then the shared repository was checked to make sure that the data were ingested and made generally available.

Detailed steps results:

| Step | Step Details | | | |
|------|---|--|--|--|
| 1 | Description | | | |
| | Trigger Exposure through OCS+Archiver | | | |
| | Test Data | | | |
| | generated by ComCam as part of test | | | |
| | Example Code | | | |
| | Expected Result | | | |
| | Ingested ComCam exposure (9 files) at NCSA in shared Butler Repo (raw). Actual Result | | | |
| | | | | |
| | Data are being routinely generate with ComCam installed at the Base Data Center. I have verified that new data were generated today (2020-10-28) and transferred to NCSA and the DBB endpoint for raw data exists and has data (i.e. files transfer has been placing new data in: /lsstdata/offline/teststand/comcam/Archiver/storage/2020-10-28) | | | |
| | Status: Pass | | | |
| 2 | Description | | | |
| | Check for presence of ingested raw data at NCSA | | | |
| | Test Data | | | |
| | Data produced in Step 1 | | | |
| | Example Code | | | |

```
# note: currently assumes butler Gen2 (from NCSA machine)
cd /project/shared/comCam
sqlite3 _parent/registry.sqlite3
select expld,dayObs,raftName,detectorName from raw where expld={expo generated in step 1};
Expected Result
query of repo registry finds appropriate data entries showing a single raft and 9 detectors
Actual Result
Following the example above the most recent raw exposure to have arrived at NCSA had expld
2020102800060.
The following was generated when using that expld:
select expld,dayObs,raftName,detectorName from raw where expld=2020102800060;
2020102800060 | 2020-10-28 | R22 | S00
2020102800060 | 2020-10-28 | R22 | S01
2020102800060 | 2020-10-28 | R22 | S02
2020102800060 | 2020-10-28 | R22 | S10
2020102800060 | 2020-10-28 | R22 | S11
2020102800060 | 2020-10-28 | R22 | S12
2020102800060 | 2020-10-28 | R22 | S20
2020102800060 | 2020-10-28 | R22 | S21
2020102800060 | 2020-10-28 | R22 | S22
```

DRAFT 11 DRAFT

Confirming successful ingestion into the shared Gen2 repo at NCSA.

Status: **Pass**

A Acronyms used in this document

| The commissioning camera is a single-raft, 9-CCD camera that will be in- | |
|--|--|
| The commissioning camera is a single-raft, 9-CCD camera that will be in | |
| stalled in LSST during commissioning, before the final camera is ready. | |
| Data Acquisition System | |
| Data Backbone | |
| Data Management | |
| Data Management Subsystem | |
| Data Management System Requirements prefix | |
| DM Technical Note | |
| DM Test Report | |
| LSST Data Management (Document Handle) | |
| Legacy Survey of Space and Time (formerly Large Synoptic Survey Tele- | |
| scope) | |
| National Center for Supercomputing Applications | |
| Observatory Control System | |
| Observatory Operations Data Service | |
| Operations | |
| Project Management Controls System | |
| Rubin Science Platform | |
| Telescope Mount Assembly | |
| United States Data Facility | |
| vendor estimate | |
| | |

DRAFT 12 DRAFT

B Traceability

| Test Case | VE Key | VE Summary |
|-----------|---------|---|
| LVV-T1934 | LVV-8 | DMS-REQ-0018-V-01: Raw Science Image Data |
| | | Acquisition |
| | LVV-11 | DMS-REQ-0024-V-01: Raw Image Assembly |
| | LVV-177 | DMS-REQ-0346-V-01: Data Availability |
| | LVV-130 | DMS-REQ-0299-V-01: Data Product Ingest |
| LVV-T1935 | LVV-130 | DMS-REQ-0299-V-01: Data Product Ingest |
| | LVV-120 | DMS-REQ-0289-V-01: Calibration Production |
| | | Processing |

DRAFT 13 DRAFT